

IB/2004/03840

# Certificate

REPUBLIEK VAN SUID-AFRIKA

REPUBLIC OF SOUTH AFRICA

PATENT KANTOOR  
DEPARTEMENT VAN HANDEL  
EN NYWERHEID

PATENT OFFICE  
DEPARTMENT OF TRADE AND  
INDUSTRY

Hiermee word gesertifiseer dat  
This is to certify that

the documents annexed hereto are true copies of:

Application forms P.1 and P.3, provisional specification and drawings of  
South African Patent Application No. 2003/9209 as originally filed in the  
Republic of South Africa on 26 November 2003 in the name of RAFFLE,  
Marie Thomas Gilles for an invention entitled: "CASTING OF METAL  
ARTEFACTS".


## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Geteken te  
d at  
**PRETORIA**

in die Republiek van Suid-Afrika, hierdie  
in the Republic of South Africa, this

dag van  
6 December 2004  
day of

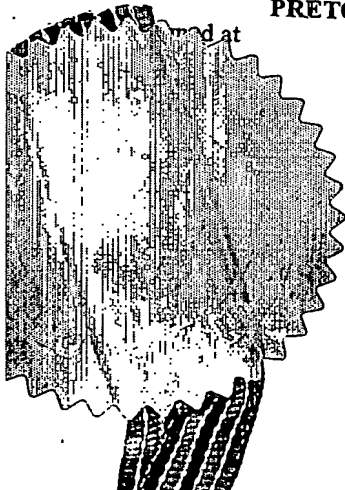

Registrar of Patents

BEST AVAILABLE COPY

REPUBLIC OF SOUTH AFRICA  
PATENTS ACT, 1978  
APPLICATION FOR A PATENT AND  
ACKNOWLEDGEMENT OF RECEIPT  
(Section 30(1) Regulation 22)

REPUBLIC OF SOUTH AFRICA	
FORM P.1 REVENUE	
(to be lodged in duplicate)	
26.11.03	R 060.00
A&A REF: V16024 AS/MJS/vd	

THE GRANT OF A PATENT IS HEREBY REQUESTED BY THE UNDERMENTIONED APPLICANT  
ON THE BASIS OF THE PRESENT APPLICATION FILED IN DUPLICATE

21 01 PATENT APPLICATION NO 20 03 / 9 2 0 9

71 FULL NAME(S) OF APPLICANT(S)

RAFFLE, Marie Thomas Gilles

ADDRESS(ES) OF APPLICANT(S)

90 The Drive, Westdene, Benoni, 1501,  
Gauteng Province, Republic of South Africa

54 TITLE OF INVENTION

" CASTING OF LIGHT METAL ARTEFACTS "

Only the items marked with an "X" in the blocks below are applicable.

THE APPLICANT CLAIMS PRIORITY AS SET OUT ON THE ACCOMPANYING FORM P.2. The earliest priority claimed is

Country: No: Date: 21 01

THE APPLICATION IS FOR A PATENT OF ADDITION TO PATENT APPLICATION NO 21 01


THIS APPLICATION IS A FRESH APPLICATION IN TERMS OF SECTION 37 AND BASED ON  
APPLICATION NO 21 01

THIS APPLICATION IS ACCOMPANIED BY:


- |                                     |  |
|-------------------------------------|--|
| <input checked="" type="checkbox"/> | A single copy of a provisional specification of 23 pages                         |
| <input checked="" type="checkbox"/> | Drawings of 5 sheets   |
| <input type="checkbox"/>            | Publication particulars and abstract (Form P.8 in duplicate) (for complete only) |
| <input type="checkbox"/>            | A copy of Figure of the drawings (if any) for the abstract (for complete only)   |
| <input type="checkbox"/>            | An assignment of invention   |
| <input type="checkbox"/>            | Certified priority document(s). (State quantity)                                 |
| <input type="checkbox"/>            | Translation of the priority document(s)  |
| <input type="checkbox"/>            | An assignment of priority rights   |
| <input type="checkbox"/>            | A copy of Form P.2 and the specification of RSA Patent Application No 21 01      |
| <input checked="" type="checkbox"/> | Form P.2 in duplicate  |
| <input checked="" type="checkbox"/> | A declaration and power of attorney on Form P.3                                  |
| <input type="checkbox"/>            | Request for ante-dating on Form P.4  |
| <input type="checkbox"/>            | Request for classification on Form P.9   |
| <input type="checkbox"/>            | Request for delay of acceptance on Form P.4                                      |
| <input type="checkbox"/>            | Extra copy of informal drawings (for complete only)                              |

74 ADDRESS FOR SERVICE: Adams & Adams, Pretoria

Dated this 26th day of November 2003

  
AV R SCHWEIZER  
ADAMS & ADAMS  
APPLICANTS PATENT ATTORNEYS

The duplicate will be returned to the applicant's address for service as  
proof of lodging but is not valid unless endorsed with official stamp

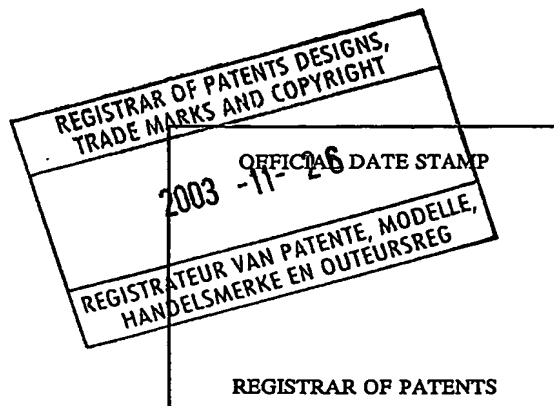

PATENT APPLICATION NO				A&A Ref: V16024 AS/MJS				LODGING DATE			
21	01	2003/		2003/9209		22	26 November 2003				

FULL NAME(S) OF APPLICANT(S)	
71	RAFFLE, Marie Thomas Gilles

FULL NAME(S) OF INVENTOR(S)	
72	RAFFLE, Marie Thomas Gilles

EARLIEST PRIORITY CLAIMED	COUNTRY	NUMBER	DATE
33	N/A	31	N/A

NOTE: The country must be indicated by its International Abbreviation - see schedule 4 of the Regulations

TITLE OF INVENTION	
54	" CASTING OF LIGHT METAL ARTEFACTS "

\* I/we Marie Thomas Gilles RAFFLE

hereby declare that :-

1. I/we am/are the applicant(s) mentioned above;
- \*\* 2. ~~I/we have been authorized by the applicant(s) to make this declaration and have knowledge of the facts herein stated in the capacity of \_\_\_\_\_ of the applicant(s);~~
- \*\*\* 3. the inventor(s) of the abovementioned invention is/are the person(s) named above and the applicant(s) has/have acquired the right to apply by virtue of an assignment from the inventor(s);
4. to the best of my/our knowledge and belief, if a patent is granted on the application, there will be no lawful ground for the revocation of the patent;
- \* 5. ~~this is a convention application and the earliest application from which priority is claimed as set out above is the first application in a convention country in respect of the invention claimed in any of the claims; and~~
6. the partners and qualified staff of the firm of ADAMS & ADAMS, patent attorneys, are authorised, jointly and severally, with powers of substitution and revocation, to represent the applicant(s) in this application and to be the address for service of the applicant(s) while the application is pending and after a patent has been granted on the application.

SIGNED THIS 25th DAY OF November

2003

  
Marie Thomas Gilles RAFFLE

(no legalization necessary)

- \* In the case of application in the name of a company, partnership or firm, give full names of signatory/signatories, delete paragraph 1, and enter capacity of each signatory in paragraph 2.
- \*\* If the applicant is a natural person, delete paragraph 2.
- \*\*\* If the right to apply is not by virtue of an assignment from the inventor(s), delete "an assignment from the inventor(s)" and give details of acquisition of right.
- \*\*\*\* For non-convention applications, delete paragraph 5.

ADAMS & ADAMS  
PATENT ATTORNEYS  
PRETORIA

FORM P6

REPUBLIC OF SOUTH AFRICA  
Patents Act, 1978

## PROVISIONAL SPECIFICATION

(Section 30 (1) - Regulation 27)

21	01	OFFICIAL APPLICATION NO
----	----	-------------------------

22	LODGING DATE
----	--------------

2003 / 9209

26 November 2003

71	FULL NAME(S) OF APPLICANT(S)
----	------------------------------

RAFFLE, Marie Thomas Gilles

72	FULL NAME(S) OF INVENTOR(S)
----	-----------------------------

RAFFLE, Marie Thomas Gilles

54	TITLE OF INVENTION
----	--------------------

" CASTING OF LIGHT METAL ARTEFACTS "

**THIS INVENTION** relates to the casting of a light metal artefact. More particularly, the invention relates to a process for casting a light metal artefact, to a melting apparatus or installation for forming a molten charge of light metal for use in casting a light metal artefact, to a casting apparatus or installation for casting a light metal artefact, to a facility for casting light metal artefacts, and to a method of casting a light metal artefact using a casting apparatus or installation in accordance with the present invention. As used herein, the term light metal encompasses both light metals as such, and alloys thereof in which light metals form the major proportion.

According to a first aspect of the invention, there is provided a process for casting a light metal artefact, which process includes the steps of:

- forming a molten charge of light metal from a precursor thereof;
- charging a die or mould with the molten charge; and
- causing or allowing the charge to solidify in the die or mould to form the artefact, the process including the step of selecting the size of the molten charge to match the capacity of the die or mould so that charging the die or mould consumes substantially the whole charge.

Although the process may include the step of forming the molten charge from a precursor thereof which is a mixture of one or more ores, fluxes, alloying elements and the like, the molten charge is preferably formed from a precursor thereof which is a light metal billet or ingot, a compact of light metal particules

such as shavings or granules, or the like. Thus, the process may include the step of pre-forming a billet or ingot of the light metal or pre-forming a compact of particules such as shavings or granules of the light metal.

Usually, charging the die or mould with the molten charge will act substantially to fill the die or mould.

The process may include heating the metal, after forming the molten charge, to increase its temperature, prior to filling the die or mould with the molten charge at the increased temperature. The step of filling the die or mould with the molten charge may be at a predetermined rate. Preferably, the filling of the die or mould with the molten charge is under pressure, for example by injection moulding. In particular, and preferably, the filling of the die or mould with the molten charge is under an intermediate pressure, being neither what is known in the art as low pressure injection moulding nor what is known in the art as high pressure injection moulding. Thus, it will be appreciated that routine experimentation should be employed to determine a desired or an optimum intermediate pressure under which the die or mould should be filled with the molten charge.

The process may include the step of purging the environment in which the molten charge is formed with a purging gas, prior to forming the molten charge. Instead or in addition, the purging may be carried out during the forming of the

molten charge. Preferably, the purging is carried out both prior to and during the forming of the molten charge. The purging gas may be a passive inert gas and may be a noble gas selected from the group consisting of argon, helium, neon and mixtures thereof. Instead, the purging gas may be an active inert gas and may be selected from the group consisting of  $\text{SF}_6$ ,  $\text{CO}_2$  and mixtures thereof. In particular, the process may include the step of purging the environment in which the molten charge is formed with an active inert purging gas selected from the group consisting of  $\text{SF}_6$ ,  $\text{CO}_2$  and  $\text{SF}_6/\text{CO}_2$  mixtures, preferably  $\text{SF}_6/\text{CO}_2$  mixtures comprising 0.1 – 0.3% by volume of  $\text{SF}_6$ , prior to and during the forming of the molten charge. In addition, the process may include, at onset of forming the molten charge, the step of sealing the molten charge in place by passing a passive inert gas selected from the group consisting of argon, helium, neon and mixtures thereof, preferably argon, past the molten charge and in contrast with, to provide a solidified light metal seal formed from part of the molten charge.

The process may include selecting the light metal from the group consisting of aluminium, magnesium, lithium, zinc and alloys thereof. Preferably the light metal is selected from magnesium, aluminium and alloys thereof.

The process is expected to be useful, in particular, in the casting of light metal or alloy products selected from the group consisting of wheel rims, such as aluminium- or magnesium-alloy wheel rims, automotive gearbox casings, steering wheel housings, brake auxiliary parts or components, and automotive engine, marine and aircraft parts

or components. Typically, the process will be used in the casting of aluminium- and magnesium-alloy wheel rims.

In particular, the process is expected to be useful in casting artefacts having cross-sectional thicknesses in the range 1.5 – 30mm, usually 2 – 27mm, with respective masses of 0.25 -30kg, usually 0.5 – 20kg.

The process may be used with any type of die or mould, for example, a disposable die or mould such as a sand die or mould, or a re-useable die or mould such as a metal die or mould. In particular, the process in accordance with the present invention is particularly suited for use with a metal die or mould forming a re-usable die or mould. Preferably, the metal die or mould is a steel die or mould.

According to a second aspect of the invention, there is provided a melting apparatus or installation for forming a molten charge of light metal for use in casting a light metal artefact in a die or mould, which apparatus or installation includes:

a container for holding a precursor of a molten charge of light metal; and

a heating arrangement for heating the precursor in the container to form a molten charge of light metal; and

a molten metal transfer assembly for transferring the molten charge from the container to a die or mould,

the container and the heating arrangement being mounted on the molten metal transfer assembly.



Typically, the heating arrangement will be in the form of at least one induction coil surrounding the container.

The apparatus or installation may include a gas supply for supplying inert gas to the container, to permit forming of the molten charge to take place under an inert atmosphere.

The container may have a hollow cylindrical interior, for example being in the form of a hollow cylinder. The container may be re-usable. Instead and preferably, the container is disposable, being for single use and being discarded thereafter. In the case where the container is disposable, it will be appreciated that cross-contamination from one metal alloy charge to another is reduced, particularly in cases where the apparatus or installation is used successively to cast artefacts comprising different metals or alloys.

The transfer assembly may comprise a telescopically moveable multi-stage piston arrangement for use in elevating the container to engage lockingly with a die or mould prior to filling the die or mould with a molten charge from the container. In a particular embodiment of the invention, in which the transfer assembly comprises said telescopically moveable multi-stage piston arrangement, the container is a said hollow cylinder, the cylinder being supported on the transfer assembly with its hollow interior in a more or less upright attitude, such that a central piston of the multi-stage

arrangement is upwardly moveable within the interior of the cylinder in sliding and more or less sealing engagement therewith so as to enable a molten charge in the cylinder to be pushed upwardly and out of the cylinder upon the upward movement of the central piston, to transfer the molten charge to a die or mould, a peripheral piston, surrounding the central piston, being upwardly moveable to urge the cylinder upwardly to cause its upper end to seat sealingly against a lower surface of the die or mould, around a charging opening into the die or mould.

In particular, the central piston may have a piston head with a sealing surface for sealingly engaging the periphery of a said charging opening into the die or mould when all the molten charge in the cylinder has been transferred from the cylinder into the die or mould. Thus, in use, the step of causing or allowing the molten charge to solidify in the die or mould to form the artefact will typically take place while the piston head sealingly engages the periphery of the opening.

The apparatus or installation may be of essentially immovable construction, being constructed *in situ*, at a production facility for casting light metal artefacts, in which case it can be regarded as an installation. Instead, and usually, the apparatus or installation is expected not to be of immovable construction, being moveable from one said production facility to another, in which case it can be regarded as an apparatus.

The apparatus or installation may be provided with wheels for running on rails forming part of a production facility provided with a die or mould, the wheels being for reciprocating the apparatus or installation between a charging position where charging of the container with a precursor of a molten charge in use takes place, and a filling position where the apparatus or installation is in alignment with a charging opening into a die or mould, to enable the container to be brought into sealing contact with the die or mould and in communication therewith, and to enable a molten charge formed by melting of the precursor in the container to be transferred from the container into the die or mould, thereby filling the die or mould with the molten charge.

According to a third aspect of the invention, there is provided a casting apparatus or installation for casting light metal artefacts, the apparatus or installation comprising:

a melting apparatus or installation for forming a molten charge of light metal as defined above; and

a die or mould arrangement for receiving the molten charge from the induction melting apparatus or installation, the melting apparatus or installation being reciprocable relative to the die or mould arrangement between a charging position where charging of the melting apparatus or installation with a precursor of the molten charge takes place, and a filling position where transfer of a molten charge to the die or mould arrangement takes place.

It is an important aspect of the casting apparatus or installation in accordance with the present invention that the capacity of the container is no larger than, and is at least roughly matched with, the size of a molten charge required to fill the die or mould to produce a single artefact. This means that, each time the die or mould is filled with a molten charge from the melting apparatus or installation, the container of the melting apparatus or installation can be emptied.

The die or mould arrangement may comprise a re-usable die or mould. In particular, the re-usable die or mould may be a metal die or mould, preferably a steel die or mould.

---

The die or mould arrangement may include a heating arrangement for heating the die or mould arrangement to a casting temperature. The heating arrangement may be an induction heating arrangement comprising one or more heating coils.

In each case where the melting apparatus or installation, on the one hand, and the die or mould arrangement, on the other hand, include one or more induction heating coils, the heating coils may be electrically connected to an electrical power supply therefor.

The invention extends to a casting facility, which includes two or more melting apparatuses or installations as defined above for melting charges of light metal, the casting facility including the same number of die or mould arrangements in which the

casting of the artefacts is carried out, the melting apparatuses or installations sharing a common heating power supply and the die or mould arrangements sharing a common heating power supply, for the casting of artefacts in respective casting cycles which are sufficiently out of phase to permit such sharing.

The arrangement of the facility is particularly suitable for the case where each heating arrangement is an induction heating arrangement, the heating power supplies being electrical power supplies.

According to a fourth aspect of the invention, there is provided a method of casting a light metal artefact, the method comprising using a casting apparatus or installation as defined above in accordance with the present invention to carry out the method steps of:

forming a molten charge of light metal by melting a precursor thereof; and  
transferring the molten charge, after melting thereof, into a die or mould in which the casting is carried out,  
the method including the step of selecting the size of the molten charge to match it with the size of the die or mould so that filling the die or mould consumes substantially the whole charge.

When the casting apparatus or installation forms part of a casting facility as defined above, the method may include using one of the shared power supplies successively to form molten charges in the respective containers of the melting

apparatuses or installations, and using the other of the shared power supplies successively to the respective die or mould arrangements, in casting cycles which are out of phase.

The invention will now be described, by way of a non-limiting illustrative example, with reference to the accompanying diagrammatic drawings, in which:

Figure 1 shows an exploded schematic side elevation of the various components of a melting apparatus or installation in accordance with the invention, for forming a molten charge of light metal, in accordance with the process of the invention;

Figure 2 is a three-dimensional view of a casting apparatus or installation in accordance with the invention, for casting light metal artefacts, in accordance with the method of the invention;

Figure 3 is a three-dimensional view of a casting facility comprising two casting apparatuses or installations of Figure 2, in accordance with the invention, for casting light metal artefacts in accordance with the method of the invention;

Figure 4 shows a series of simplified schematic side elevations of the casting apparatus or installation of Figure 2, illustrating the method of casting a light metal artefact in the form of a magnesium alloy wheel rim, in accordance with the invention, using the casting apparatus or installation of Figure 2; and

Figure 5 is another series of simplified schematic side elevation of the casting apparatus or installation of Figure 2, further illustrating the method of casting a light metal artefact in the form of a magnesium alloy wheel rim illustrated by Figure 4.

Referring first to Figure 1 of the drawings, reference numeral 10 generally refers to a melting apparatus or installation for forming a molten charge of light metal, in accordance with the invention.

The melting apparatus or installation 10 comprises a container 12 in the form of a hollow cylinder or sleeve 14 of circular cross-section for holding a molten charge of light metal and also for facilitating heating of a precursor of the charge of light metal, an induction heating arrangement 16 comprising an induction coil 18 for heating contents of the cylinder or sleeve 14 to form a molten charge, and a molten metal transfer assembly 20 for transferring a molten charge of light metal from the cylinder or sleeve 14 to a die or mould (not shown in Figure 1, but see Figures 3 to 5) in which an artefact is cast.

The melting apparatus or installation 10 also includes an inert gas supply 22 for supplying argon gas to the interior of the cylinder or sleeve 14 such that melting of the light metal charge takes place under a substantially inert atmosphere, and also to provide cooling to the lower end or base of the cylinder or sleeve 14 to form a secondary seal therefor as described hereunder.

The cylinder or sleeve 14 is re-useable. The cylinder or sleeve 14 is made of mild- or low carbon steel. In other embodiments, the cylinder or sleeve 14 is optionally made of cast iron or stainless steel.

In use, the induction coil 16 is mounted on the metal transfer assembly 20, the coil 16 surrounding the cylinder or sleeve 14 to heat the contents thereof.

The transfer assembly 20 comprises a telescopically moveable multi-stage piston arrangement 24 for use in elevating the cylinder or sleeve 14 to engage lockingly with the periphery of a downwardly facing charging opening of a die or mould, prior to filling the die or mould with a molten charge from the cylinder or sleeve 14. The multi-stage piston arrangement 24 incorporates a central piston comprising three telescopic piston rods 26, 27, 28 with the central rod 28 having a piston head 30 provided with a conical sealing surface 31 for sealingly engaging the periphery of an opening into a die or mould when an entire molten charge in the cylinder or sleeve 14 has been transferred from the cylinder or sleeve 14 into said die or mould. The multi-stage piston arrangement 24 includes a variable force and speed controller (not shown) for controlling the rate of movement thereof and also for controlling the upward force exerted by the piston head 30 on a molten charge in the cylinder or sleeve 14 and in a die or mould, when the piston head 30 sealingly engages the periphery of the charging opening of the die or mould.

Thus, in use, the cylinder or sleeve 14 is supported on the transfer assembly 20, such that the multi-stage piston arrangement 24 is moveable within the interior of the cylinder or sleeve 14 in sliding and sufficiently sealing engagement therewith so as to enable a molten charge in the cylinder or sleeve 14 to be pushed upwardly and out



of the cylinder or sleeve 14 upon the upward movement of the piston rods 26, 27, 28, to transfer and inject the molten charge into a die or mould.

The transfer assembly 20 also comprises a plurality of concentric barrels 32, 34, 35, 36 and 37 of different diameters. The barrels 32, 34, 35, 36 and 37 are telescopically vertically displaceable, relative to one another and nest in one another.

The barrel 32 is the bottom barrel and has wheels 38 for running on rails (not shown) forming part of the casting installation of Figures 3 to 5 for reciprocating the melting apparatus or installation 10 between a charging position where charging of the cylinder or sleeve 14 with a precursor of a molten charge takes place, and a filling position where the melting apparatus or installation 10 is in alignment with the charging opening of a die or mould of a casting apparatus or installation, to enable a molten charge formed by melting of a precursor thereof in the cylinder or sleeve 14 to be transferred therefrom into said die or mould, thereby typically filling it with the molten charge. The barrel 37 is the top barrel and provides a circumferentially extending upwardly facing support ring having a groove (not shown) for sealingly engagingly the lower end of the cylinder or sleeve 14 therein. The barrel 35 in turn provides a circumferentially extending upwardly facing support ring on which the induction coil 18 is supported when placed over the cylinder or sleeve 14 to surround it.

In addition to the seal provided by the groove on the barrel 37, argon gas supplied via the gas supply 22 provides cooling to the lower end of the cylinder or sleeve 14 at the onset of melting of the precursor of the molten charge, allowing part of the molten charge formed to solidify in a zone between the piston arrangement 24 and the top barrel 37 and at the lower end of the cylinder or sleeve 14, thereby providing a secondary seal which is formed of solidified light metal from the molten charge.

Referring now to Figure 2 of the drawings, reference numeral 50 generally refers to a casting apparatus of installation for casting light metal artefacts, in accordance with the invention. The same parts are assigned the same reference numerals as in Figure 1, unless otherwise specified.

The casting apparatus or installation 50 comprises the melting apparatus or installation 10 as described above and a die or mould arrangement 52 comprising a die or mould 54 and a heating arrangement 56.

The die or mould 54 is a multi-core or segmented re-useable steel die or mould, comprising a top core 58 to which the solidified artefact remains removably attached at the end of the casting process, a bottom – or face core 60 having a centrally located charging opening or passage 62 provided therethrough for charging or filling the die or mould 54 from below, and a segmented ring of four side cores 64 associated with respective pistons 66, the side cores 64 giving the die or mould 54 its segmented

character. The die or mould 54 is hydraulically operated, with regard to the pistons 66 of the side cores 64 and with regard to lifting of the top core 58 and any attached light metal casting (not shown), upwardly and away from the remaining cores. The casting apparatus or installation 50 also includes a die or mould hydraulic controller 67 and a melting apparatus or installation 10 hydraulic controller 69.

The top core 58 is associated with release means (not shown) for releasing the artefact therefrom at the end of the casting process.

The heating arrangement 56 comprises six induction coils, operable independently of one another, for achieving a desired temperature profile in the die or mould 54. Thus, the casting apparatus or installation 50 also includes a central processing unit (CPU) 70 for monitoring the heating of the heating arrangement 56 to achieve the desired temperature profile, and also for providing feedback control to respective power supplies 82 and 84 (Figure 3) therefor.

The casting apparatus or installation 50 also includes rails (not shown) on which the wheels 38 of the metal transfer assembly 20 forming part of the melting apparatus or installation 10 can run. Thus, the melting apparatus or installation 10 is reciprocable relative to the die arrangement 52 between a charging position (as shown in Figure 2) where charging of the melting apparatus or installation 10 with a precursor of the molten charge takes place, and a filling position (see Figures 4 and 5) where

transfer of a molten charge from the melting apparatus or installation 10 to the die 54 of the die or mould arrangement 52 takes place.

Referring now to Figure 3 of the drawings, reference numeral 80 generally refers to a casting facility according to the invention. The casting facility 80 comprises two casting apparatuses or installations 50 each comprising a melting apparatus or installation 10 for induction melting a charge of light metal and a die or mould arrangement 52 in which the casting of the artefact is carried out. The casting facility 80 also includes a melt induction heating power supply 82, for example of 100kW, for separately supplying power to each of the two melting apparatuses or installations 10, a die induction heating power supply 84, also for example of 100kW, for separately supplying power to the die or mould arrangements 52, a cooling tower (not shown) for providing cooling fluid, and a gas supply control unit 86 for supplying purging gases to the melting apparatuses or installations 10 and also to the die or mould arrangements 52.

It will be appreciated that the casting facility 80 permits two artefacts to be cast simultaneously using casting cycles which are out of phase, the melting apparatuses or installations 10 sharing the common induction heating power supply 82 and the die or mould arrangements 52 sharing the common induction heating power supply 84. The casting of the artefacts then takes place in respective casting cycles which are sufficiently out of phase to permit such sharing. It will thus be appreciated that the casting facility 80 can be operated in quasi-continuous fashion, in that the casting

apparatuses or installations 50 can be used on an alternating basis, with the one having its melting apparatus or installation in its filling position and being used for casting while the other has its melting apparatus or installation in its charging position and is charged with a precursor of the light metal, and being prepared to be reciprocated to its filling position, as soon as the casting process in the other casting apparatus or installation 50 is completed.

Referring now to Figures 4 and 5 of the drawings, use of the casting apparatus or installation 50 described above is illustrated with reference to casting a light metal artefact in the form of a magnesium alloy wheel rim 90, using a precursor in the form of a pre-formed billet or ingot 92 of a magnesium-aluminium-zinc alloy known in the art as AZ91. The billet or ingot 92 is placed on the piston arrangement 24, with the associated melting apparatus or installation 10 in its charging position. The cylinder or sleeve 14 placed over the billet or ingot 92, such that the lower end of the cylinder or sleeve 14 sealingly engages said groove on the top barrel 37 of the metal transfer assembly 20. The induction coil 18 is then placed over the cylinder or sleeve 14 such that it surrounds the cylinder or sleeve 14 and is supported on the barrel 35 of the metal transfer assembly 20.

The die arrangement 52 is prepared for casting by lowering the top core 58 and raising the bottom- or face core 60 such that they engage with the ring of side core segments 64, which are placed in position using their pistons 66. Purging gas in the form of a  $\text{SF}_6/\text{CO}_2$  fluxing gas mixture comprising 0.2% by volume  $\text{SF}_6$  is fed into the

die or mould 54 and the die or mould 54 is heated using the induction coil 64 by electrical power fed from the induction heating power supply 84 using a pre-selected frequency, until the die or mould 54 achieves a required operating temperature, and has a desired temperature profile. The rate of heating can be altered by changing the frequency of the power supply 84, with a higher frequency resulting in a higher heating rate; and loops of coil 64 can be selectively operated with different power supplies thereto, to achieve said temperature profile.

The melting apparatus or installation 10 is reciprocated with the aid of the wheels 38 on the rails (not shown) on the casting apparatus or installation 50, from the charging position where charging of the cylinder or sleeve 14 with the billet or ingot 92 of a molten charge of AZ91 alloy takes place, to a filling position where the melting apparatus or installation 10 is in alignment with the charging opening 62 through the bottom- or face core 60 of the die or mould 54. The cylinder or sleeve 14 is sealingly engaged with the lower surface of the bottom- or face core 60, by raising the barrel 37 hydraulically, which also seals the cylinder or sleeve 14 to the barrel 37. The billet or ingot 92 is heated under an argon atmosphere introduced to the cylinder or sleeve 14 by the gas supply 22, until a molten charge of AZ91 alloy is formed, with the argon also providing cooling of the molten charge at the lower end of the cylinder or sleeve 14 to form a secondary seal in the form of a solidified portion or sprue of the light metal (not shown).

Once the desired operating temperature and temperature profile have been achieved in the die or mould 54, and the die or mould 54 has been pressure locked with the aid of the pistons 66 by means of the hydraulic controller 67, the gas supply to the cylinder or sleeve 14 is cut off and the molten charge is transferred under pressure from the cylinder or sleeve 14 into the die or mould 54 by means of the piston arrangement 24, thereby filling the die or mould 54 with the molten charge. Prior to and during the injection of the molten charge into the die or mould 12, the die or mould 12 is purged with the abovementioned  $\text{SF}_6/\text{CO}_2$  fluxing gas by means of the gas supply control unit 86. The piston head 30 locks sealingly against the periphery of the charging opening 62 and partially enters the charging opening 62 to increase the pressure on the molten charge in the die or mould 54. The die or mould 54 is allowed to cool down and the melting apparatus or installation 10 is disengaged from the die or mould 54. The melting apparatus or installation 10 is then reciprocated back to its charging position.

The die or mould 54 is then opened by hydraulically disengaging the ring of side core segments 64 from one another with the aid of the pistons 66, and the top core 58 with the solidified wheel rim 90 attached thereto, is lifted, using the controller 67. The wheel rim 90 is then detached or released from the top core 58 by allowing downwardly directed pins forming part of the release means (not shown) to push the wheel rim 90 downwardly during the raising of the top core 58.

The piston arrangement 24 is lowered and then the barrels of the assembly 20 are retracted, releasing the cylinder or sleeve 14 and the solidified portion or sprue (not shown) of the molten charge which formed the secondary seal for the cylinder or sleeve 14. The used cylinder or sleeve 14 is then discarded and a new cylinder or sleeve 14 used for casting a new wheel rim 90. It will be appreciated that the discarding of the used cylinder or sleeve 14 and use of a new cylinder or sleeve 14 to cast a new wheel rim 90, allows for the substantially uninterrupted casting of artefacts one after the other from billets or ingots comprising different alloy compositions, taking no longer than casting from the same alloy composition, using the same casting cycle but, naturally, with different temperatures and temperature profiles, if appropriate. In one embodiment of the invention, the melting apparatus or installation 10 allows casting of alloy wheel rims comprising the following alloys one after the other, without fear of cross-contamination: AM60B (aluminium-magnesium-manganese alloy), Galsi12dv (aluminium-silicon alloy), AZ91 (magnesium-aluminium-manganese-zinc alloy) and Galsi7 (aluminium-silicon alloy)

It is an advantage of the present invention that the size of the precursor for the molten charge, for example the billet or ingot 92, is matched with the volume of molten metal charge required to charge or fill the die or mould 54 to produce a single artefact, for example a single wheel rim 90. Thus, metal wastage is reduced, if not eliminated, in comparison to the casting of light metal artefacts or wheel rims 90 in accordance with casting processes generally known in the art, wherein substantially more light metal is melted, than is required for one wheel rim.



It is a further advantage of the invention that the melting apparatus or installation 10 and also the casting apparatus or installation 50 are expected not necessarily to be of a permanent construction, being moveable from one production facility to another with ease, thus the casting apparatus or installation 50 may be inexpensively set up close to an end user of the artefacts to be cast, thereby reducing transportation costs, and the like.


It is a further advantage of the present invention that the casting apparatus or installation 50 does not require much space for it to be erected. For example, the casting apparatus or installation 50 as described above only requires a floor space of about 23m<sup>2</sup>. The present process also offers other costs benefits such as the fact that power supply only has to be fed to the casting apparatus or installation 50 immediately prior to casting and can be switched off at the end of casting a single artefact, without adversely affecting the process. In the case of a power failure during the casting process using the method and casting apparatus or installation 50 of the present invention, it will be appreciated that, losses are confined to the molten charge in the cylinder or sleeve 14, comprising the single billet or ingot 92, as compared to a typical foundry where the process is continuous and large amounts of metal have to be molten at any given point in time, all of which can solidify in the event of a power failure.

It is yet a further advantage of the process in accordance with the present invention, that it does not require running-in in order to achieve the optimum process conditions. Precursors of the light metal such as the billet or ingot 92 are made to a required composition and metallography. Thus, the precursors such as the billet or ingot 92 can be a stock item. It will be appreciated that wheel rims 90 produced from a stock of billets or ingots 92 will exhibit similar metallography and hence similar properties, so that quality control is enhanced. The fact that the process does not require a running-in cycle or cycles means that a particular number of billets or ingots 92, barring any power failures, should yield an equivalent number of wheel rims 90.

Dated this **26th** day of **NOVEMBER 2003**.



**AV vR SCHWEIZER**  
**ADAMS & ADAMS**  
**APPLICANT'S PATENT ATTORNEY**

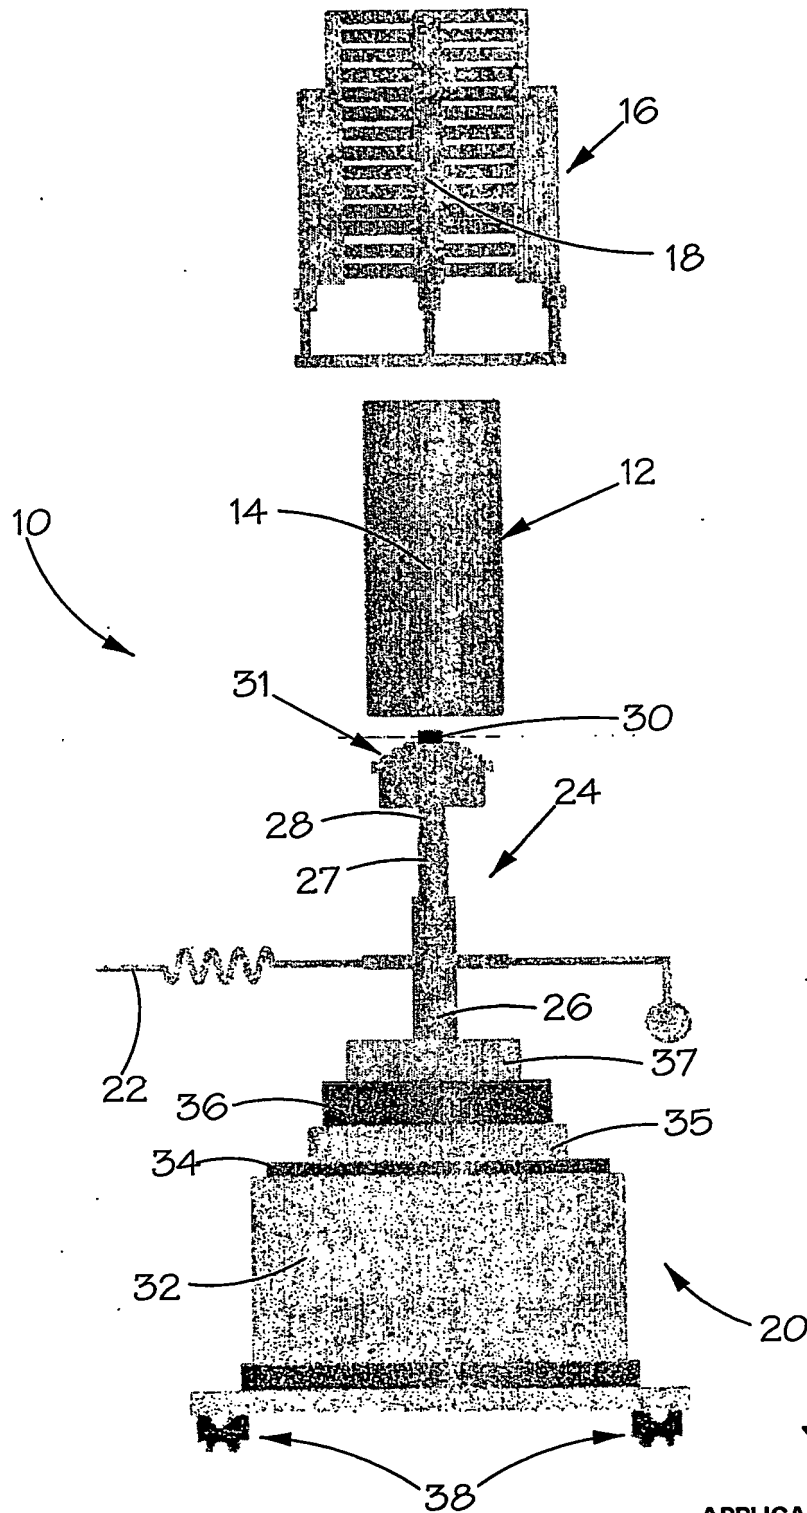

*AV vR SCHWEIZER*  
ADAMS & ADAMS  
APPLICANT'S PATENT ATTORNEY

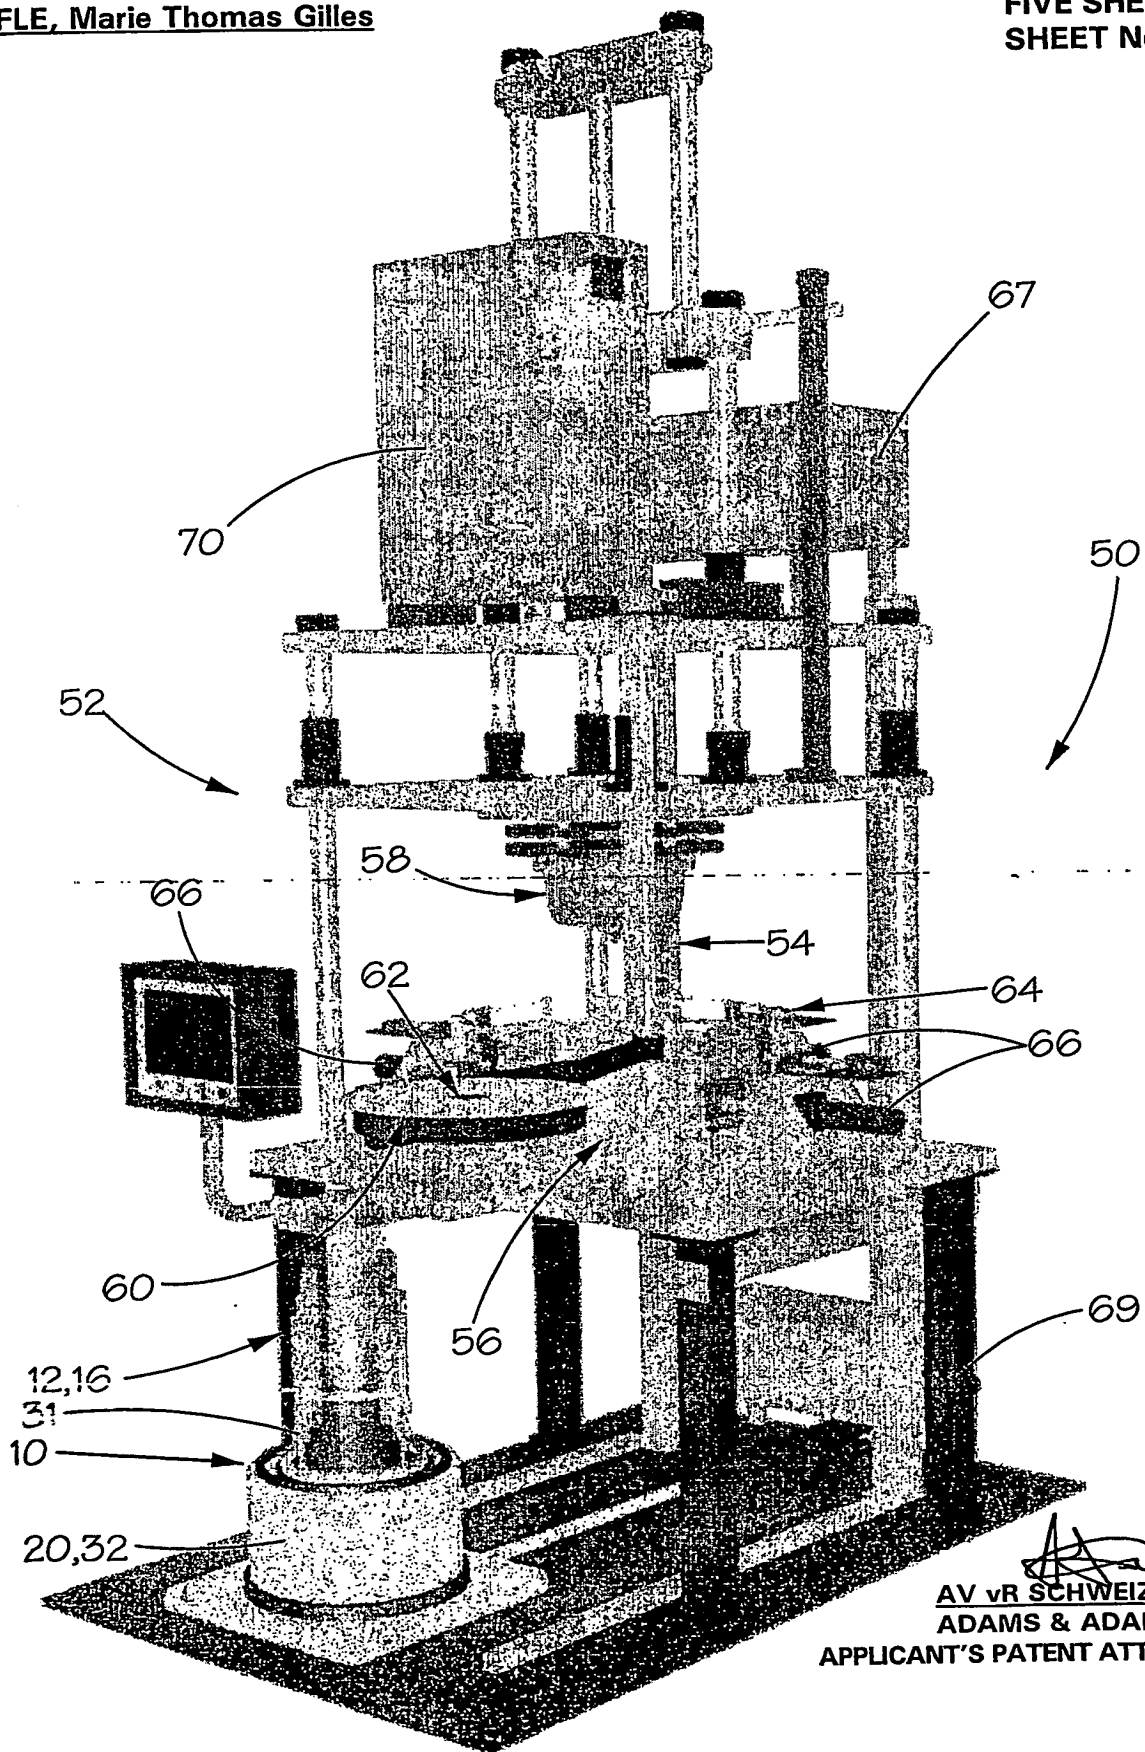

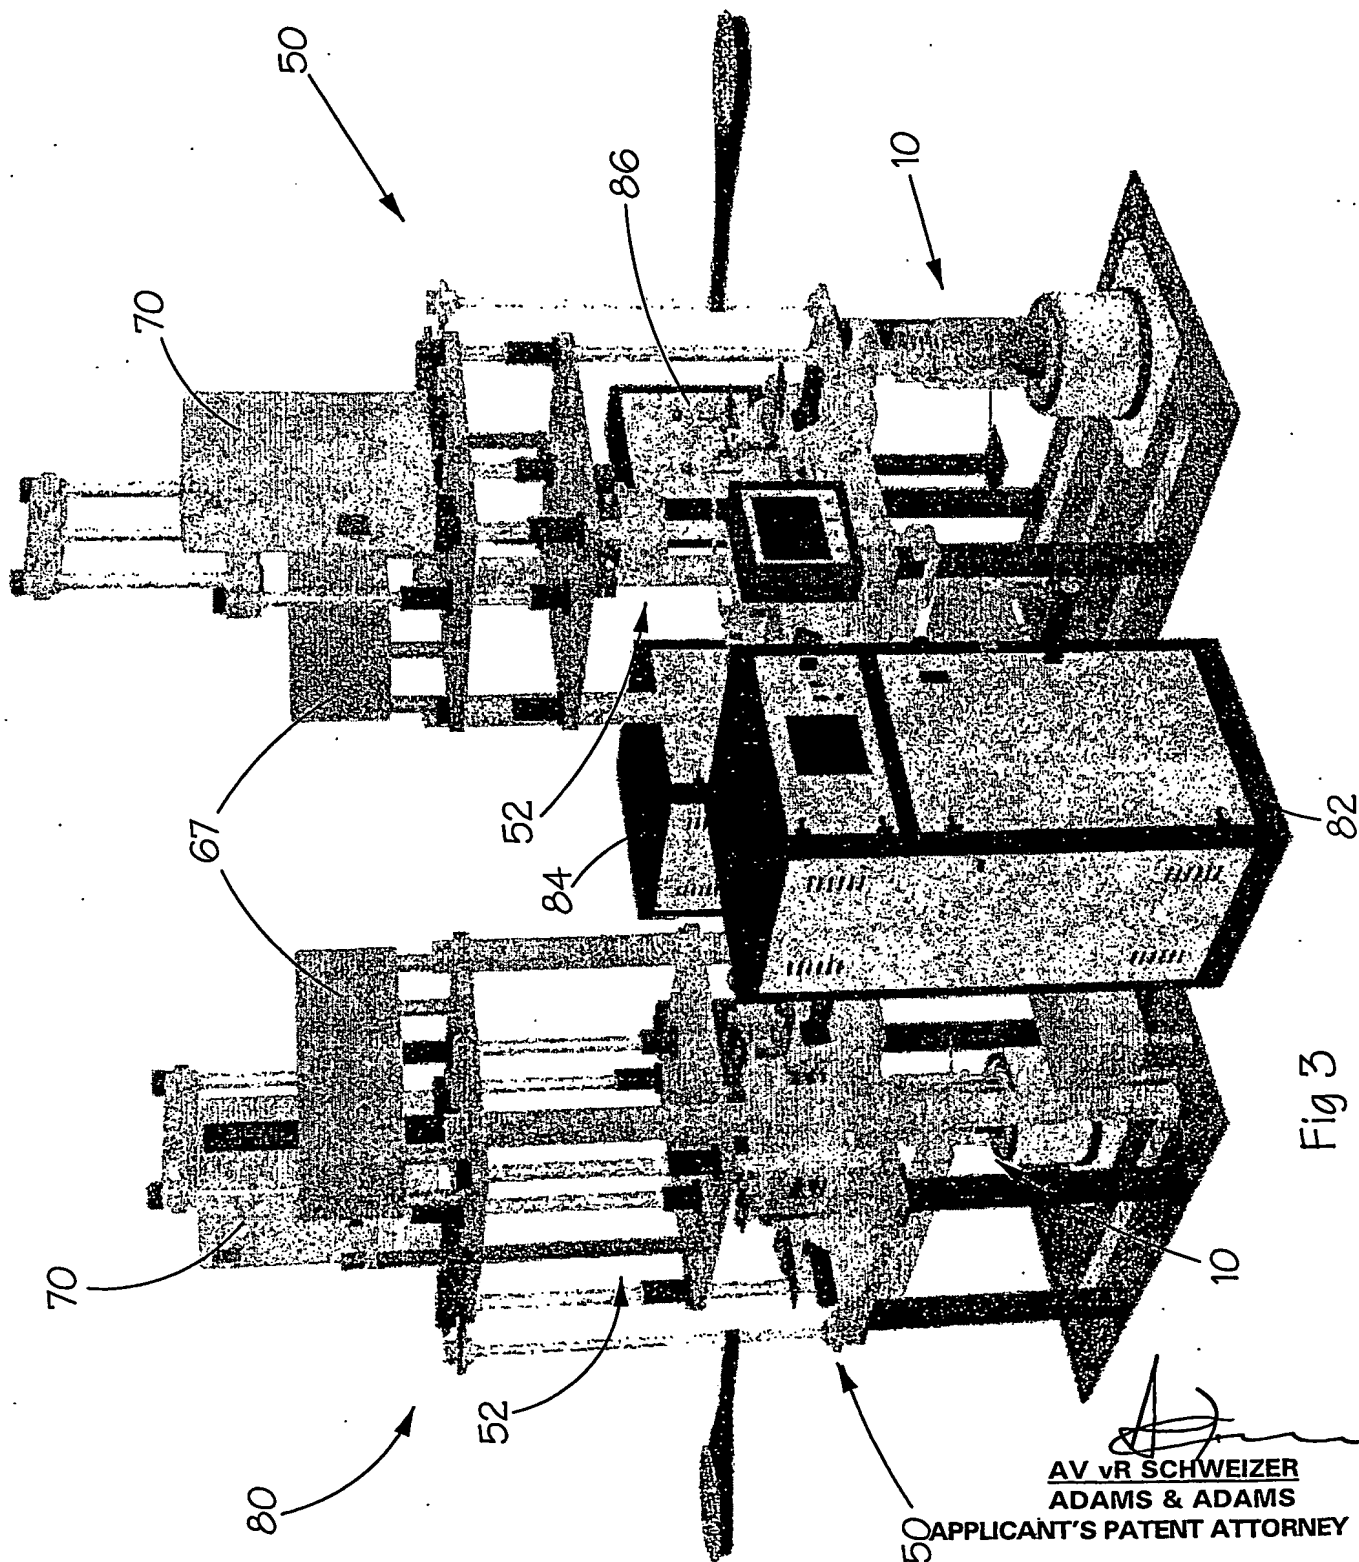


Fig 2

  
AV vR SCHWEIZER  
ADAMS & ADAMS  
APPLICANT'S PATENT ATTORNEY



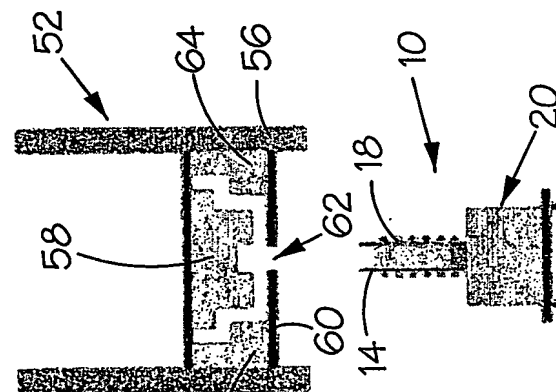
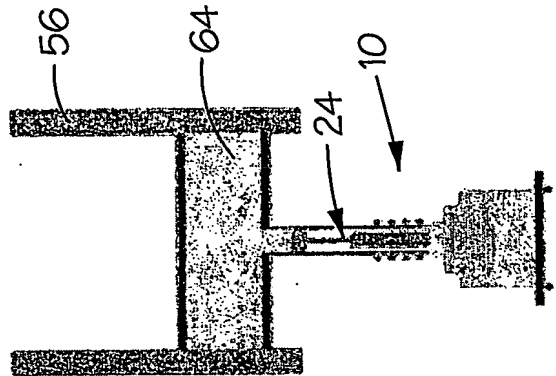
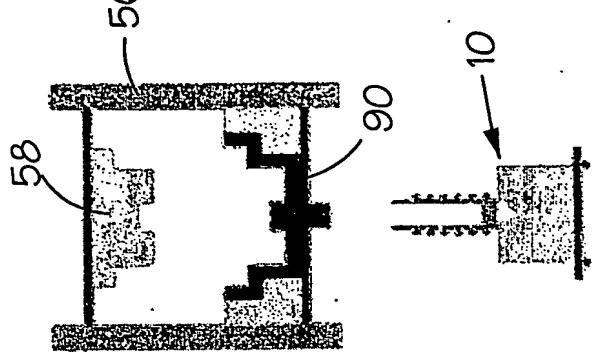


Fig 4

92

AV vR SCHWEIZER  
ADAMS & ADAMS  
APPLICANT'S PATENT ATTORNEY

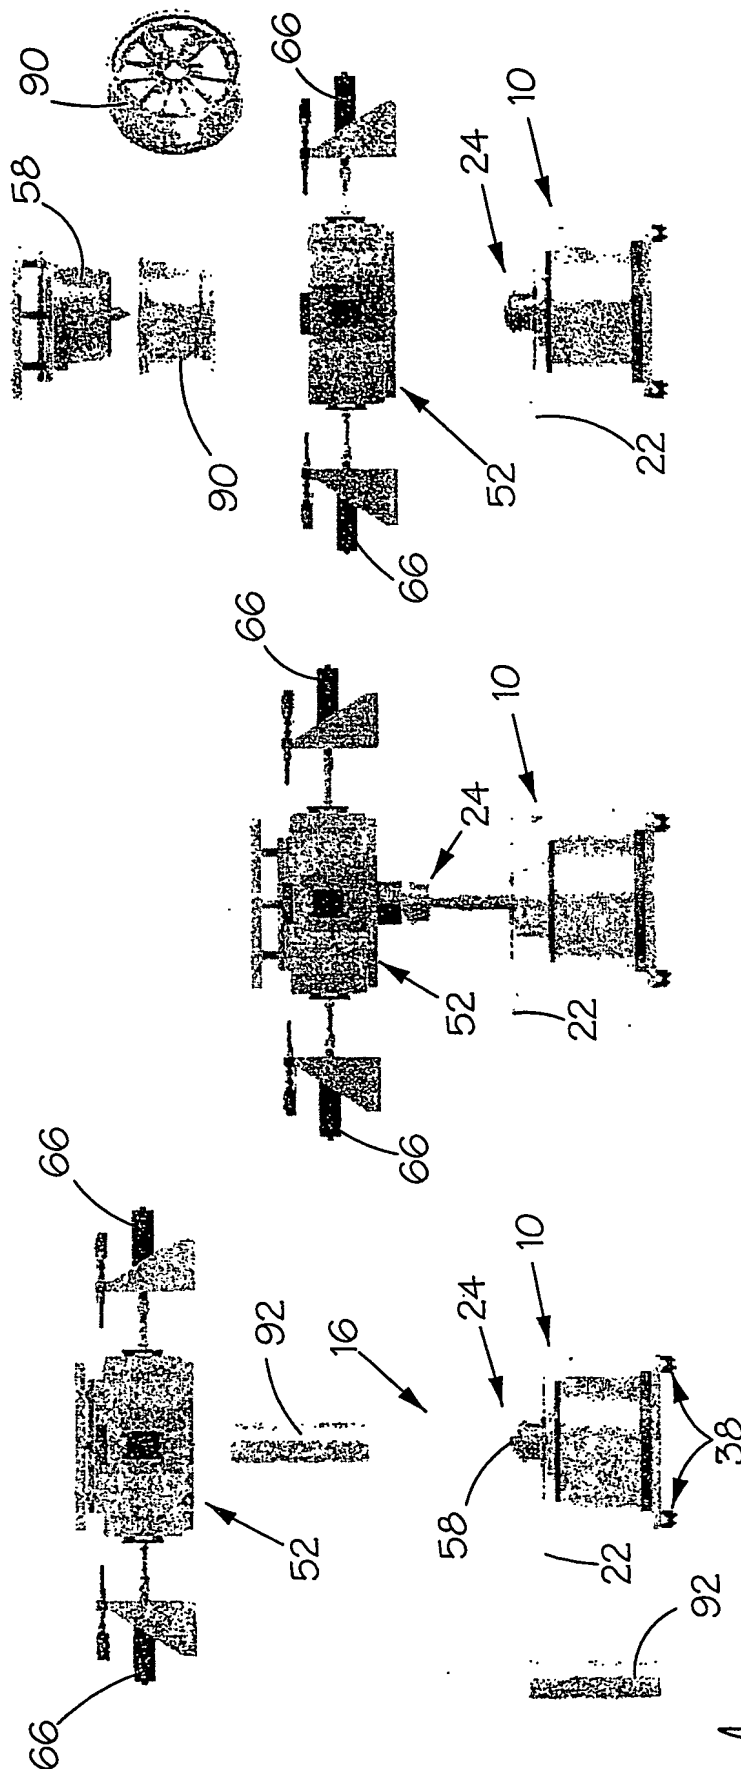


Fig 5

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**